


5-SERIES MODEL PISTON DIAPHRAGM PUMPS

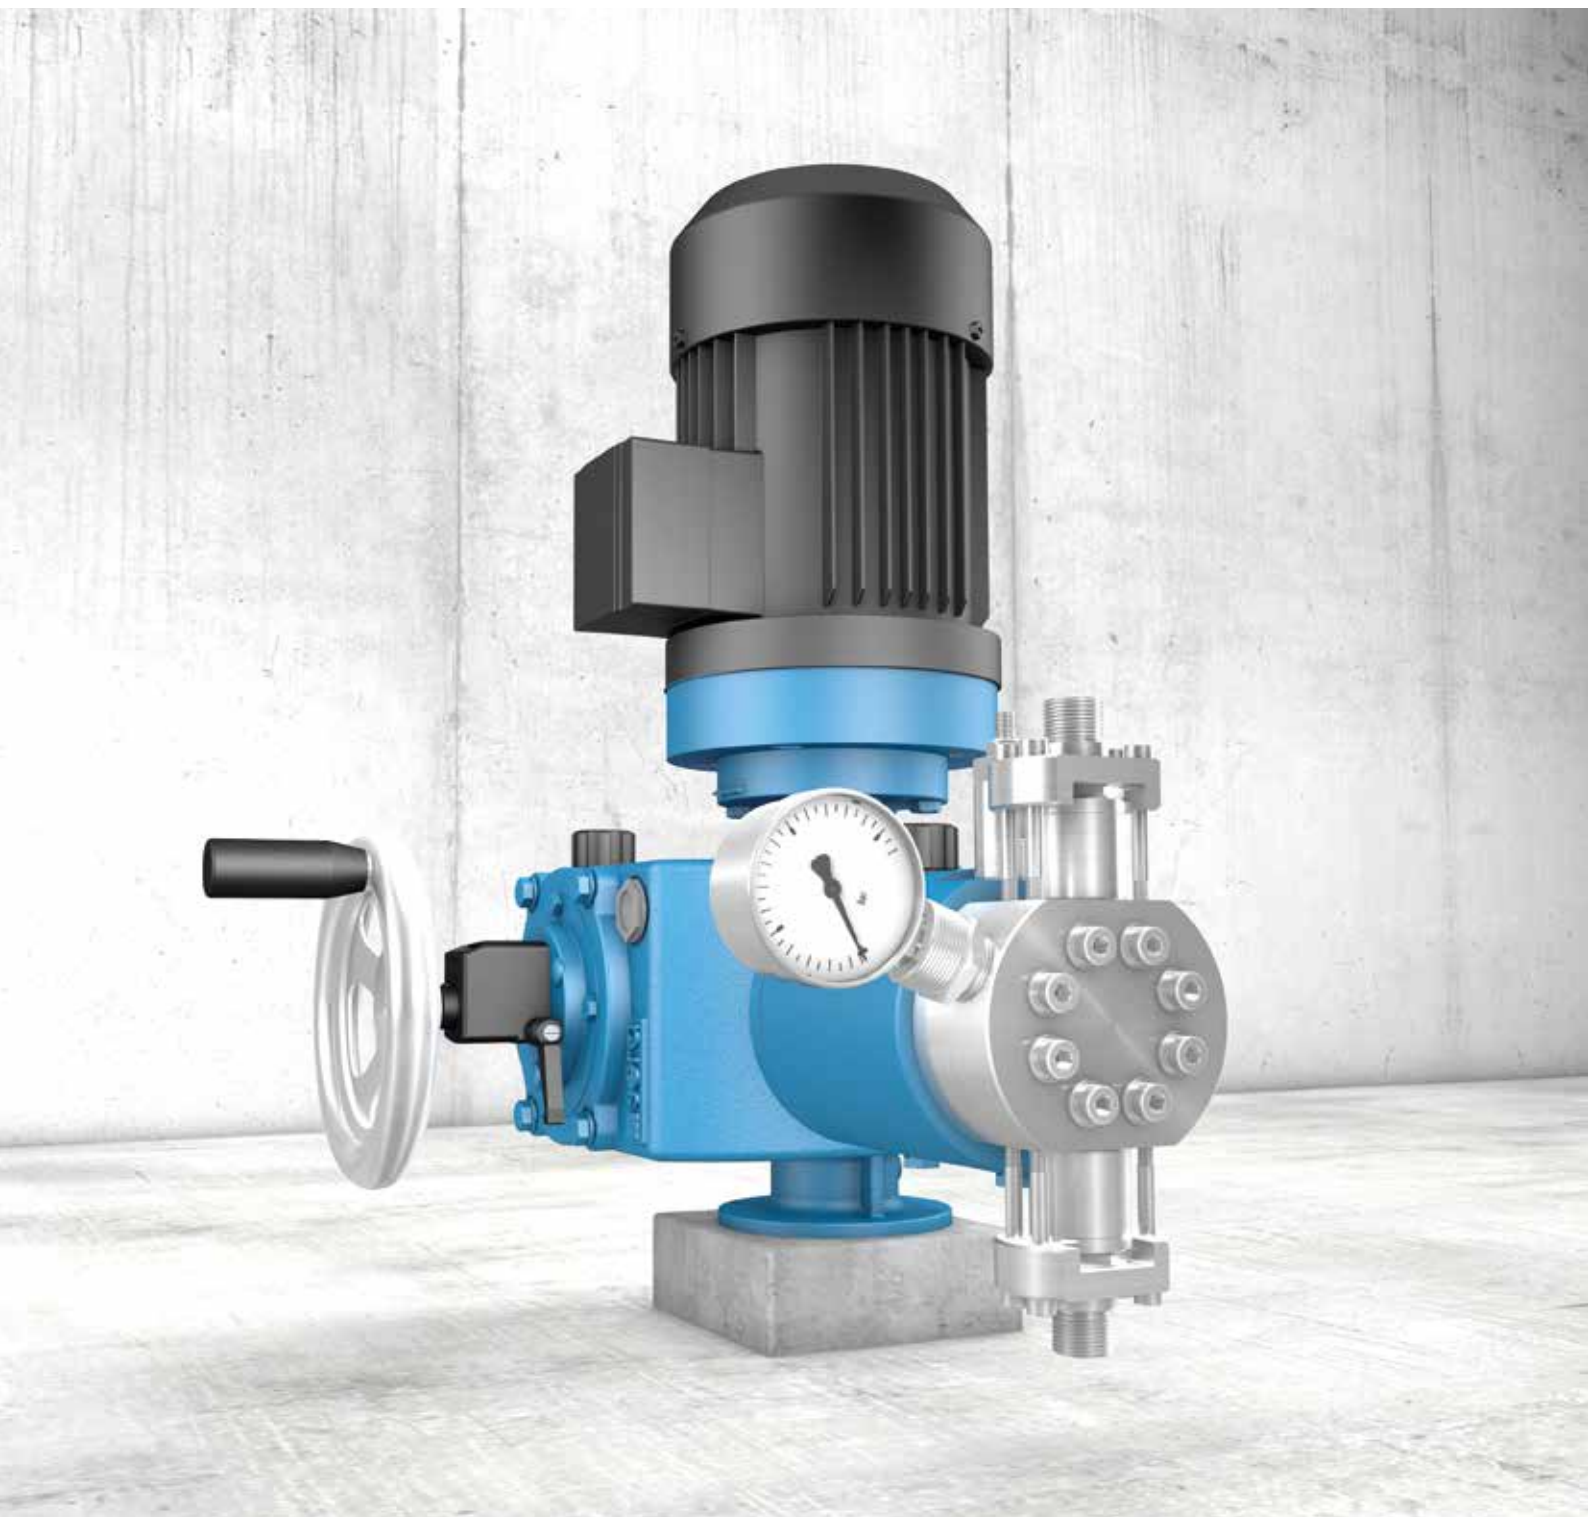

Use in a large number of applications thanks to great capacities

PISTON DIAPHRAGM PUMPS

THE ALLROUNDER FOR THE INDUSTRY

The **sera** piston diaphragm pumps 509.1 KM transmit the stroke movement of the mechanically controlled piston hydraulically to the multi-layer diaphragm. An integrated compensating valve ensures an excellent dosing accuracy and an optimum overload protection. The flow rate can be adjusted via the stroke length by means of a variable eccentric. The flow rate is also adjustable via a speed control using an external frequency converter.

AREAS OF APPLICATION

- Oil & gas industry
- Refineries
- Petrochemical industry
- Chemical industry
- Power plants
- Energy technology
- Pharmaceutical & cosmetics industry

AUTOMATIC FLOW RATE ADJUSTMENT

- Three-phase motors suitable for frequency converter operation for change of the stroke frequency via an external frequency converter
- Actuators with position regulators for automatic stroke length adjustment

OVERVIEW OF THE BENEFITS

- High dosing accuracy
- Counter pressure up to 300 bar
- Overload protection by an integrated hydraulic valve
- High process reliability by the multi-layer diaphragm
- Display of the diaphragm condition by an integrated diaphragm monitoring
- CE and EAC Conformity Certificate

OPTIONAL MODELS

- ATEX compliant design
- API 675 standard

MODELS

MATERIALS

The materials used are suitable for nearly all requirements and guarantee a safe continuous operation.

PUMP BODY AND VALVES

1.4571

VALVE BALLS

1.4401

VALVE SEALS

FEP-covered

DRIVE DIAPHRAGM


PTFE (3 layers)

DRIVE

The corresponding drive unit consists of a proven motor model coupled with a stroke mechanism in a robust housing.

The **sera** housings satisfy even the most demanding conditions. Material thickness and the surface treatment also withstand chemical affects.

509.1 KM Stroke length adjustment using a manual adjusting wheel

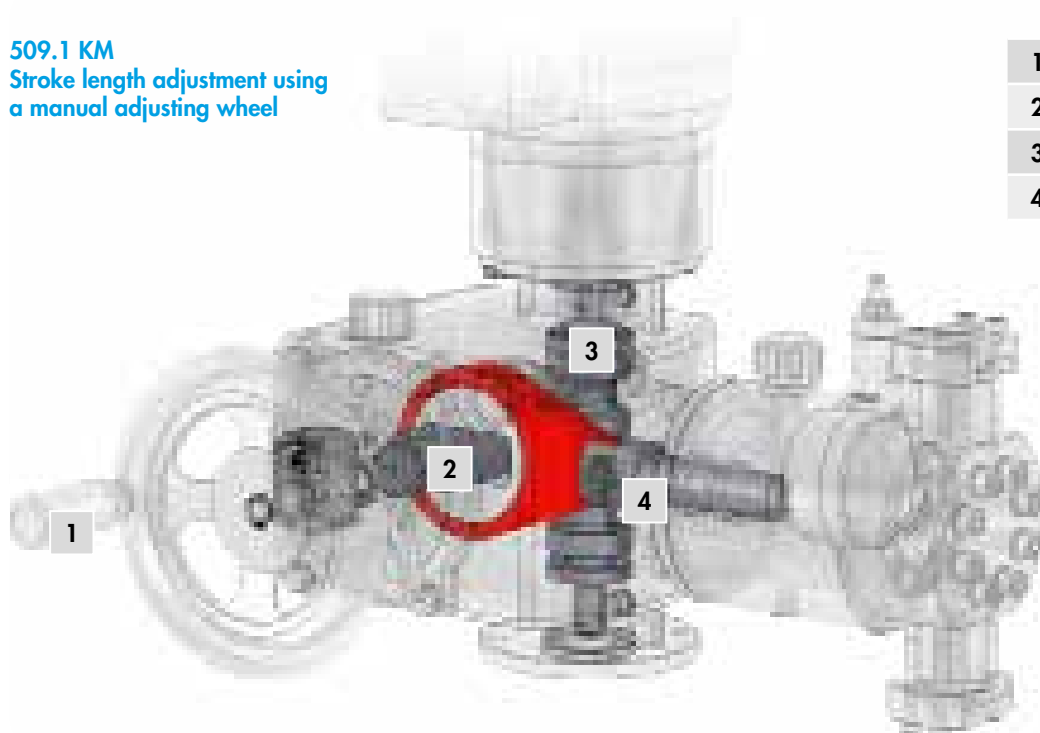

1	Adjusting wheel
2	Eccentric shaft
3	Drive shaft
4	Piston

REGULATIONS

The flow rate is constant or continuously adjustable.

Manual adjustment of the flow rate by:

- stroke length adjustment using a variable eccentric
- reproducibility +/- 1% at 10 - 100% stroke length

automatic flow rate adjustment, dependent on the analogue input signals, by:

- three-phase motors suitable for frequency converter operation for change of the stroke frequency via an external frequency converter
- actuators with position regulators for automatic stroke length adjustment

SPECIAL MODELS

We offer individual solutions for special dosing requirements:

Duplex or triplex models

ACCESSORIES

To ensure an optimum installation of the dosing pumps, all accessories required such as pressure relief valves, pressure keeping valves, pulsation dampers, dosing valves, dosing tanks, flow monitors etc. can be ordered from us.

ADDITIONAL FEATURES



ELECTRIC ACTUATOR FOR STROKE LENGTH ADJUSTMENT

The electric actuator for stroke length adjustment enables an automatic setting via a control unit so that a manual setting is no longer required. Depending on the flow rate desired the actuator turns the variable eccentric in and out.

DIAPHRAGM MONITORING

In case of damage of the working diaphragm, the medium under pressure flows through a bore to the signal manometer and causes a pointer deflection (optical diaphragm monitoring). If the diaphragm is monitored by a pressure switch the switch sends a signal in case of a diaphragm damage.



MULTI-LAYER DIAPHRAGM

If the working diaphragm is damaged impeccable tightness of the system is ensured due to the design of the multi-layer diaphragm with diaphragm monitoring. The damage of the working diaphragm does not cause a direct failure of the dosing pump.



STROKE FREQUENCY TRANSMITTER

sera dosing pumps are oscillating displacement pumps with an exactly defined stroke volume per each pump stroke. The stroke frequency transmitter records the individual pump strokes and reports each individual stroke to an evaluation unit.



CUSTOMER-ORIENTED MODULAR DESIGN

MODULAR DESIGN BY ADAPTATION OF PUMP HEADS OR COMBINATION OF THE DRIVE HOUSINGS

- Solutions for various process requirements
- Duplex or triplex design on the basis of individual elements
- Combination of different sizes possible
- Suitable for dosing of mixtures
- Optimum adaptation to room conditions
- Low pulsation due to overlaid partial currents




TECHNICAL DATA

PUMPENDATEN			RF 509.1-...			
			...6,5 KM	...18 KM	...28 KM	...74 KM
Zulässiger Druck p_{2max} im Austritt der Pumpe	bar		300	250	125	60
Nennförderstrom QN bei p_{2max}	l/h	50 Hz	0-6,5	0-18	0-28	0-74
		60 Hz	0-8	0-22	0-34	0-89
Volumen pro Hub	ml/Hub	(100%)	1,10	2,47	4,40	8,62
Max. Saughöhe	mWS		2	2	3	3
Min./max. zulässiger Druck im Eintritt der Pumpe	bar	$p_{1min/max}$	-0,2/0	-0,2/0	-0,3/0	-0,3/0
Empfohlene Nennweite DN der Anschlussleitungen	mm		4	4	8	8
Nennhubfrequenz	1/min	50 Hz	168	168	168	168
		60 Hz	202	202	202	202
Gewicht ca.	kg		43	43	50	50

ELEKTRISCHE DATEN		RF 509.1-... KM
Leistungsaufnahme	kW	0,55
Nennspannung	V DC	230/400V 50Hz, 460V 60Hz
Frequenz	Hz	50/60
Frequenzregelung	Hz	30 - 60
Isolationsklasse	ISO	F
Schutzart	IP	55

DIMENSIONS

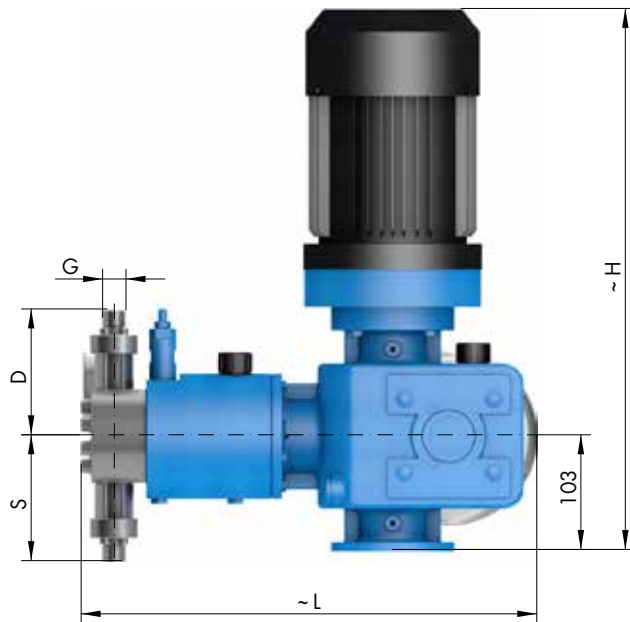

		RF 509.1-...			
SAUGVENTILE ⁽¹⁾		...6,5 KM	...18 KM	...28 KM	...78 KM
DN	Nennweite	4	4	8	8
G	Anschlussgewinde	G½	G½	G½	G½
S	Einfachventile	1.4571	–	132	132
S	Doppelventile	1.4571	114	–	–
DRUCKVENTILE ⁽¹⁾					
DN	Nennweite	4	4	8	8
G	Anschlussgewinde	G½	G½	G½	G½
D	Einfachventile	1.4571	–	132	132
D	Doppelventile	1.4571	114	–	–
MAX. GESAMTHÖHE					
H		490	490	490	490
MAX. GESAMTBREITE					
B		370	370	370	370
MAX. GESAMTLÄNGE					
L		415	415	465	465

(Maßangaben in mm) ⁽¹⁾ Basisausführung

FOLLOW US



sera ProDos GmbH
sera-Str. 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-02
Fax: +49 5673 999-03
info-prodos@sera-web.com

www.sera-web.com