

MODULAR ENERGY SYSTEM




MODULAR ENERGY SYSTEM (MES)

The Modular Energy System are used, among other things, for district and industry power solutions. For self-sufficient supply tasks for heat or electricity, the **sera** Modular Energy System compresses hydrogen for long-term storage. The booster solution is designed for filling long-term energy storage systems or emergency power solutions. The sera solution enables the year-round, independent and emission-free operation of energy and heat supply systems.

APPLICATION

In its function, the Modular Energy System increases the pressure of the hydrogen. The system limits are thus the supply line or the gas outlet. In the Modular Energy System, the hydrogen is highly compressed as required in order to increase the energy density of the medium. An electrolysis system or other hydrogen sources can be located upstream. Downstream are storage tanks and consumers.

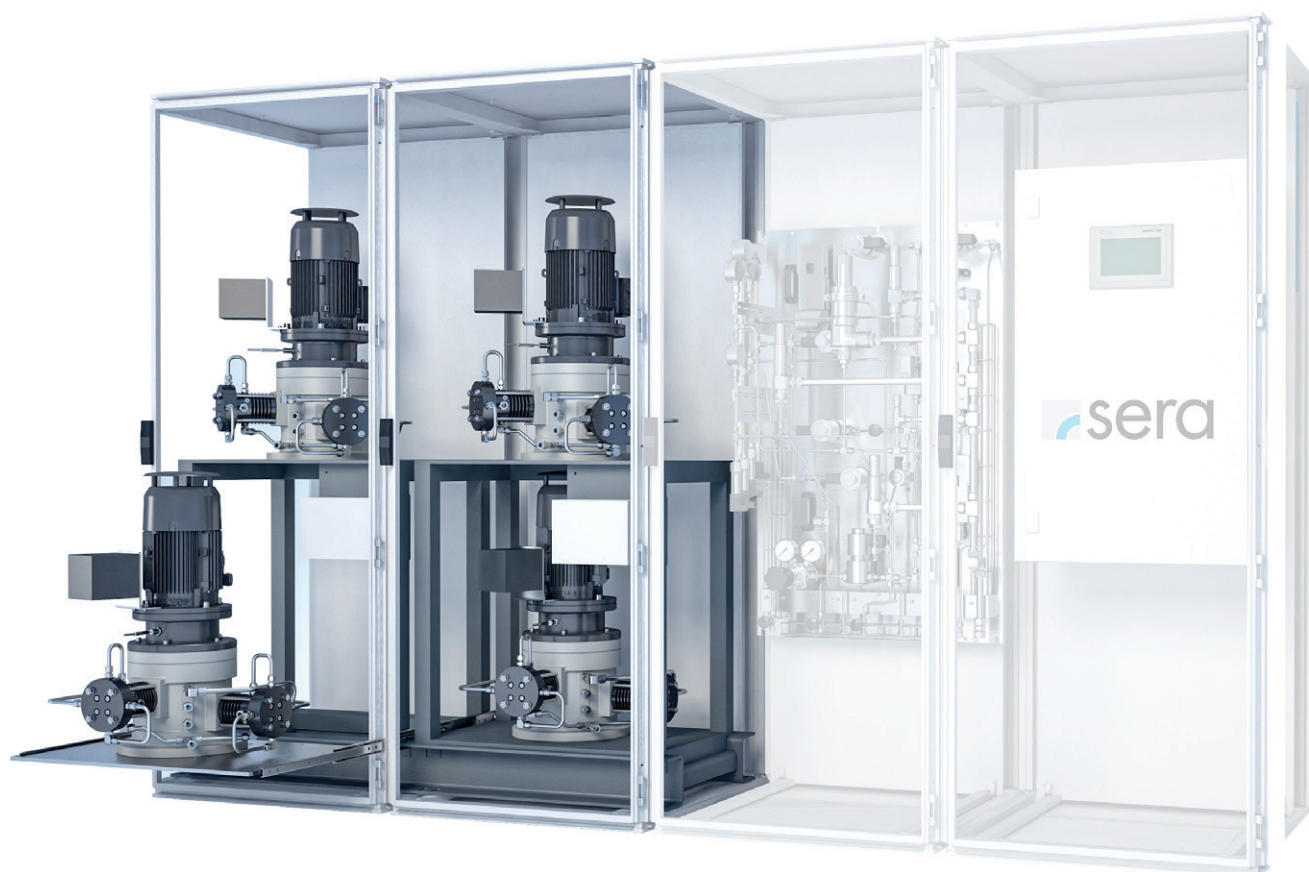


The core of the Modular Energy System consists of one to four Piston Compressor (IN series) connected in parallel.

Instrumentation and a corresponding control system are optional.


Note: if the instrumentation option is selected, a control system is mandatory!

MODULAR ENERGY SYSTEM (MES)

The modular design of the Piston Compressor (IN series) makes the compressor system flexibly expandable. By adding up to four Piston Compressors, systems with larger delivery volumes can be designed.

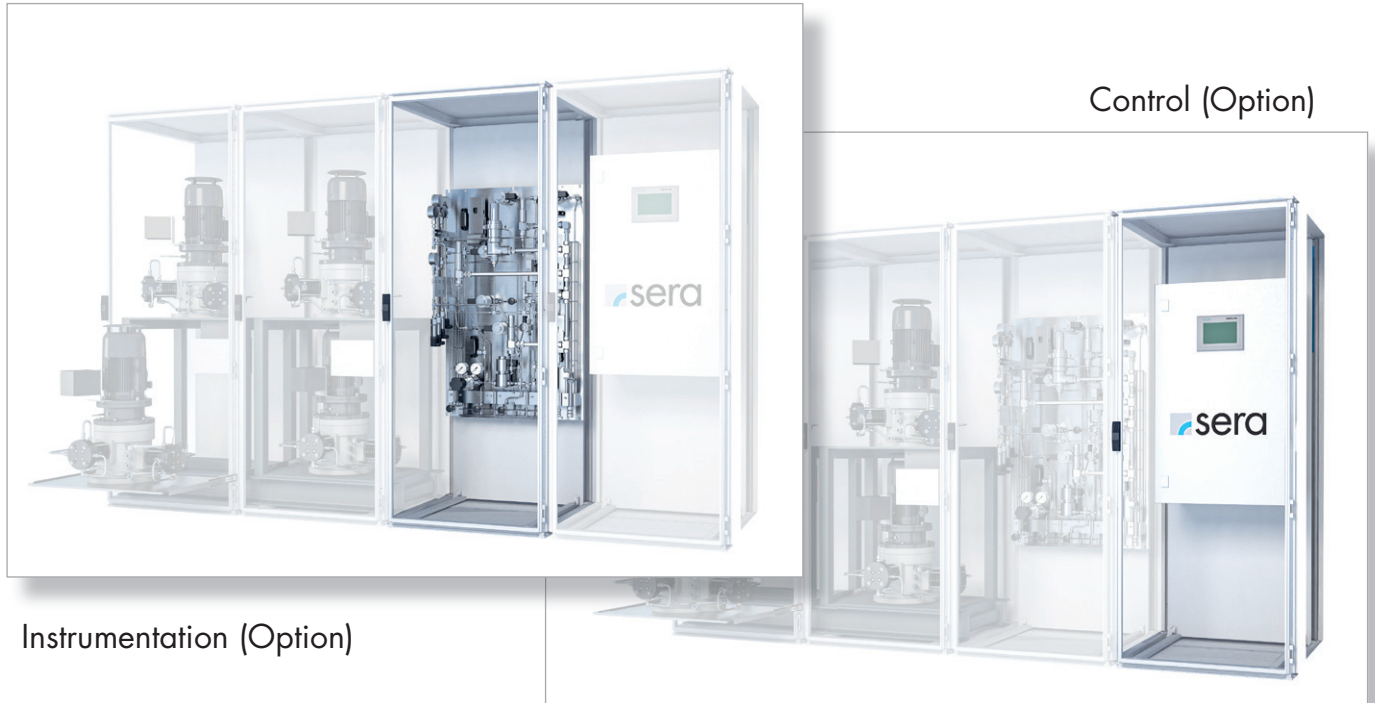

DIMENSIONS

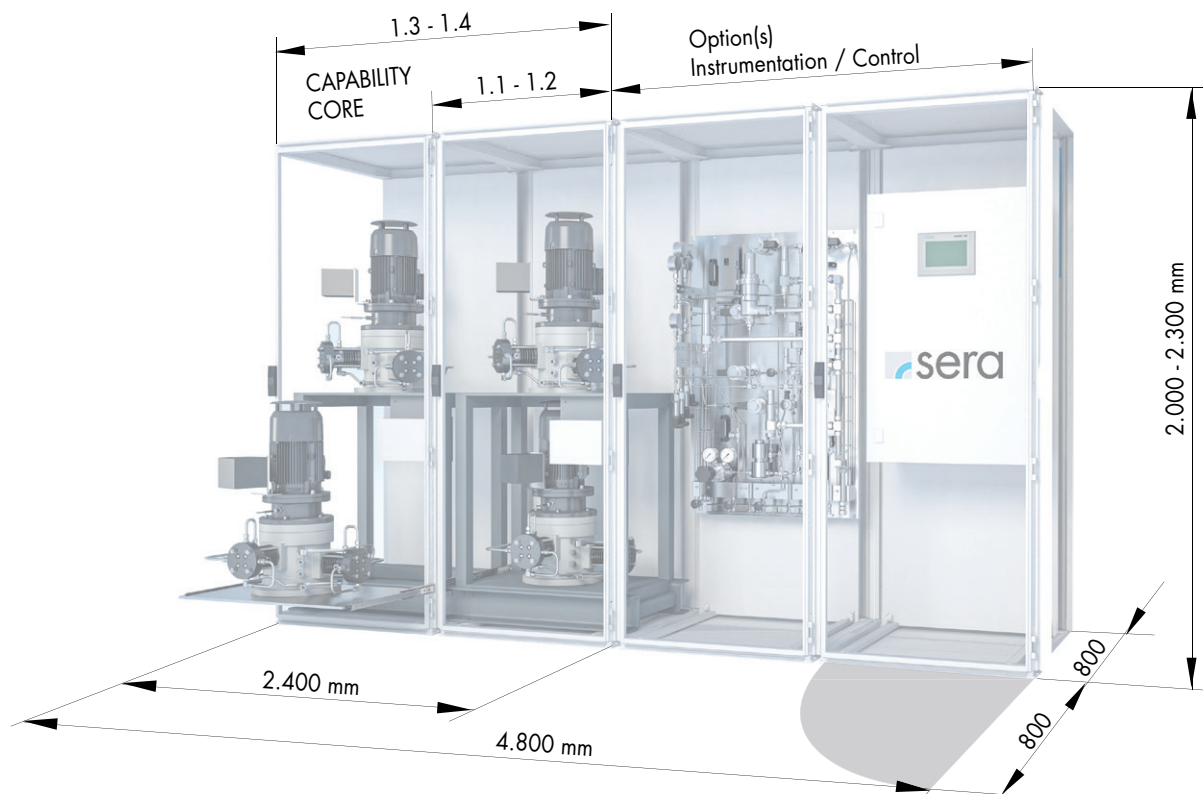

MODULAR ENERGY SYSTEM SYSTEM- AND COMPRESSOR DATA

SYSTEM DATA

Inlet pressure	25-30 bar(g)
Outlet pressure	300 bar(g)

Delivery rate with test gas helium at 30 bar(g) inlet pressure

MES 1.1	$\geq 2,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 3,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
MES 1.2	$\geq 4,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 6,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
MES 1.3	$\geq 6,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 9,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
MES 1.4	$\geq 8,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 12,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure

COMPRESSOR DATA

Inlet pressure (PS)	Short-term min. 10 bar(g) Operation 25 - 30 bar(g) Housing pressure max. 40 bar(g)
Outlet pressure	max. 300 bar(g)
Delivery rate per Piston Compressor with test gas helium at 30 bar(g) inlet pressure	$\geq 2,0 \text{ Nm}^3/\text{h}$ at 300 bar(g) final pressure $\geq 3,0 \text{ Nm}^3/\text{h}$ at 150 bar(g) final pressure
Protection class	IP 55
Noise emission	< 60 dB(A)
Corrosion protection	Painting C2 according to DIN EN ISO 12944-2

ENVIRONMENTAL CONDITIONS

Max. Installation height	1,000 m above sea level, higher placement with de-rating
Ambient temperature	-15 °C - +40 °C

CONVEYING MEDIUM

Gas type	Hydrogen 5.0, dry, solids-free (if lower qualities are used, but at least 3.5, this may result in altered sealing behaviour)
Inlet temperature	Max. 30°C
Dew point hydrogen	-50°C at 1 bar
Compressor contamination	Abrasion due to seals, initial lubricant


MODULAR ENERGY SYSTEM SYSTEM- AND COMPRESSOR DATA

DRIVE/MOTOR


Motor type of the individual compressors	Asynchronous motor, 4-pole
Speed	approx. 540 rpm (18Hz) and 750 rpm (25Hz)
Electrical voltage	220 VAC (Y)
Drive power per compressor	2.200 W; 750 W (at 16Hz)
Continuous power consumption per compressor	approx. 650 W

INTERFACES

Electrical	potential-free contacts
Communication	PROFINET
Gas inlet	½"
Gas outlet	½"
Purge connection	½"
Blow-off line	½"

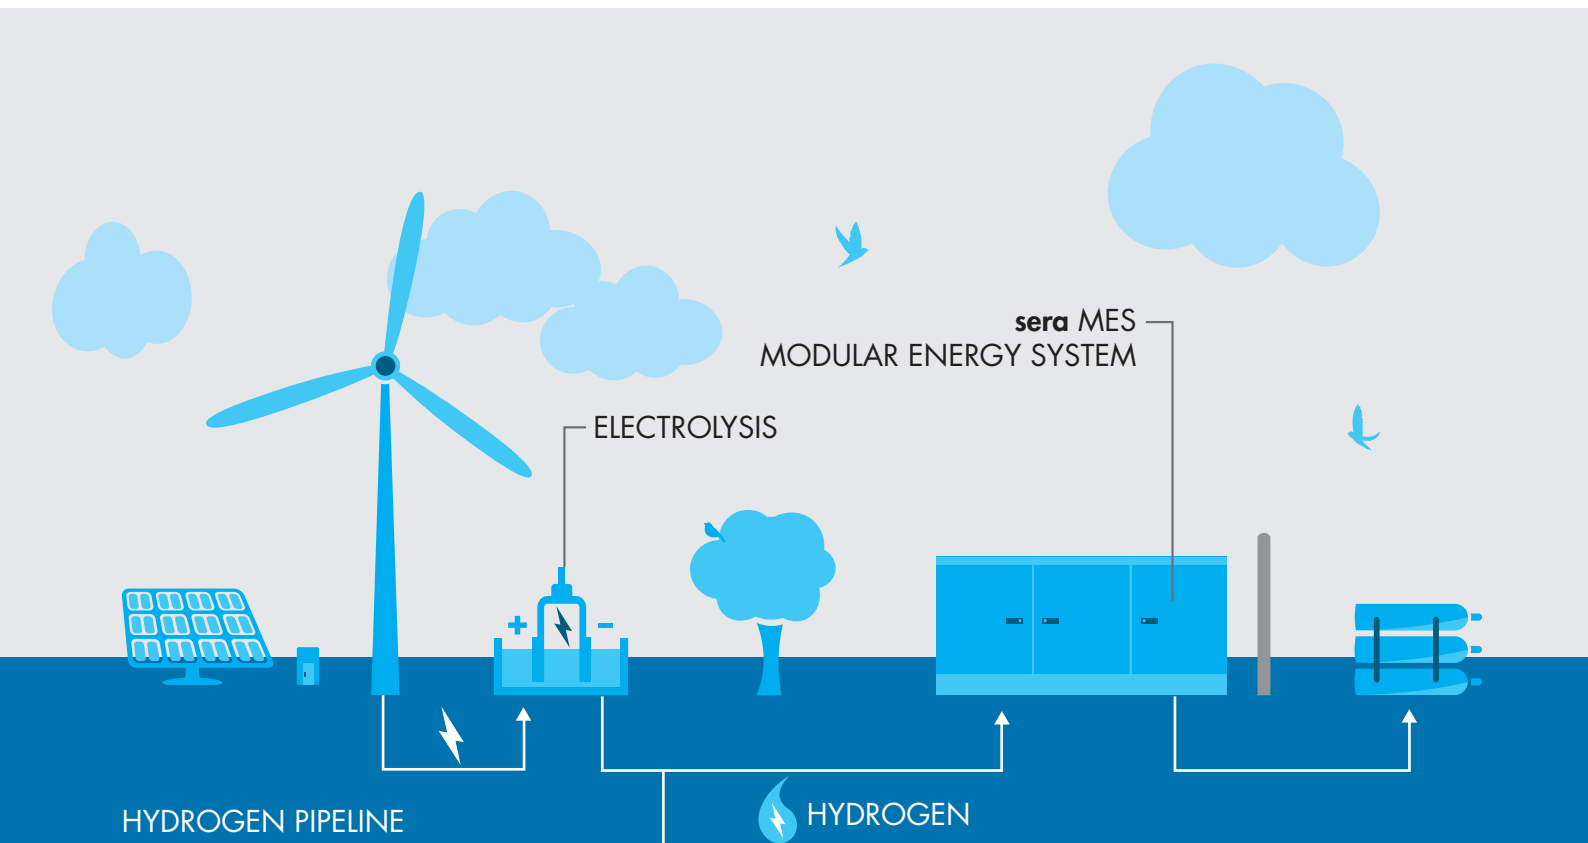

FOLLOW US

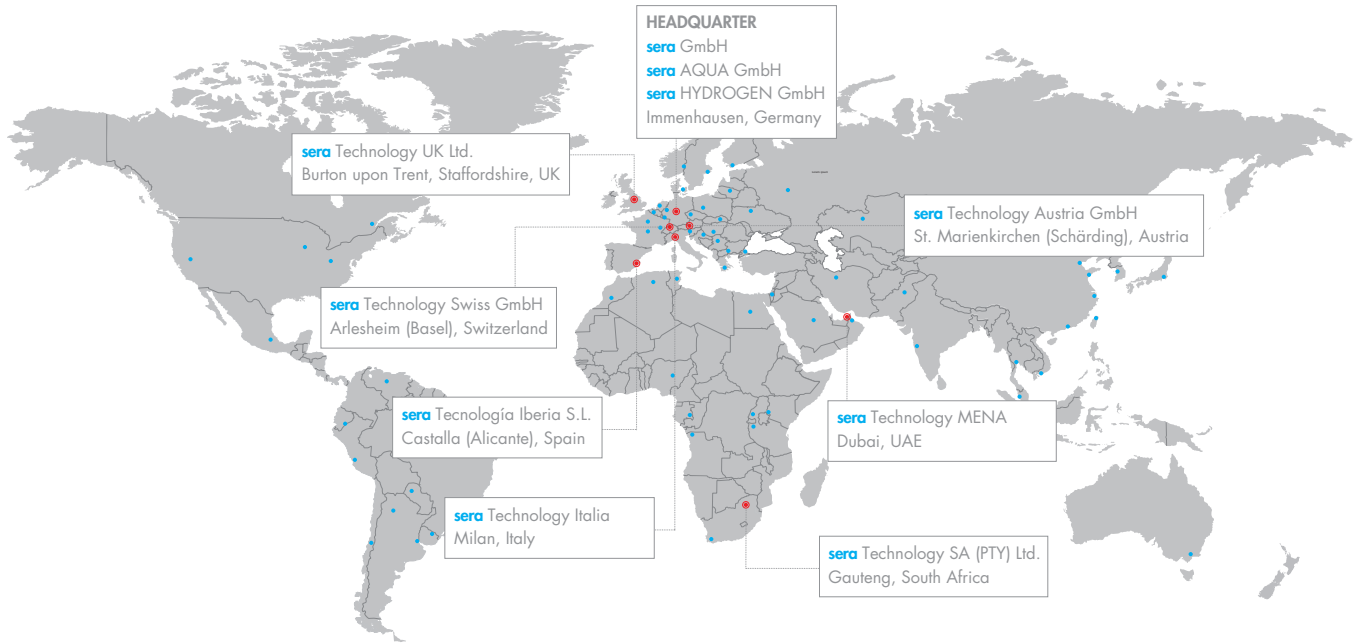

WORKING FOR YOU ALL OVER THE WORLD

sera GmbH

sera-Straße 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-00

info@sera-web.com

sera AQUA GmbH

sera-Straße 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-02

sales.aqua@sera-web.com

sera HYDROGEN GmbH

sera-Straße 1
34376 Immenhausen
Germany

Tel.: +49 5673 999-04

sales.hydrogen@sera-web.com

sera Technology Austria GmbH

Gewerbestraße 5
4774 St. Marienkirchen bei Schärding
Austria

Tel.: +43 771 131 7770

sales.at@sera-web.com

sera Technology Swiss GmbH

Altenmatteweg 5
4144 Arlesheim
Switzerland

Tel.: +41 615 114 260

sales.ch@sera-web.com

sera Tecnología Iberia S.L.

Calle Cocentaina n°8,
03420 Castalla (Alicante)
Spain

Tel: +34 666 024 388

sales.es@sera-web.com

sera Technology UK Ltd.

Unit 5, Granary Wharf Business Park
Wetmore Road, Burton upon Trent
Staffordshire DE14 1DU
United Kingdom

Tel.: +44 1283 753 400

sales.uk@sera-web.com

sera Technology SA (PTY) Ltd.

Unit 3-4, Airborne Park
Cnr Empire & Taljaard Str Bartletts
Boksburg, 1459 Gauteng
South Africa

Tel.: +27 113 975 120

sales.za@sera-web.com

sera Tecnología Italia

Milan
Italy

Tel.: +39 340 81 92 744

sales.it@sera-web.com

sera Technology MENA

Dubai
UAE

Tel.: +971 589 287 559

sales.mena@sera-web.com

www.sera-web.com

